



Wiring Instructions: Hookup of a 5803030 Universal Gas Detector to the 5851008 Emergency Shutoff System



www.concoa.com

1-800-225-0473

Fail-Safe Wiring (Will Alarm if Detector Loses Power)

Connect to "CONTACT" terminal of appropriate input on 585 1008. Refer to CONCOA ADI # 99065850.

Connect to "+12 VDC" terminal of appropriate input on 585 1008. Refer to CONCOA ADI # 99065850.

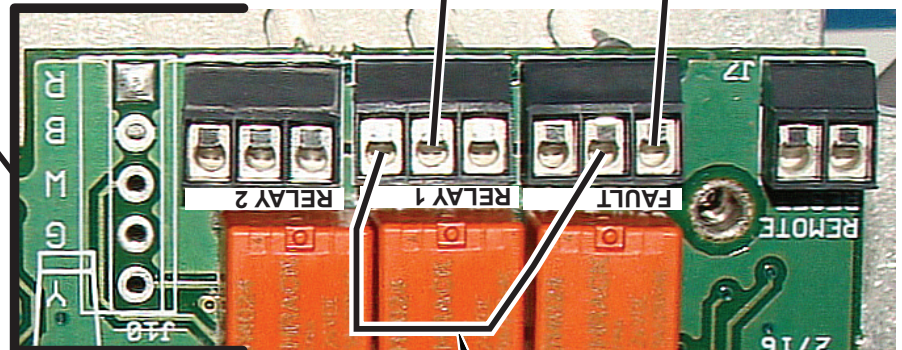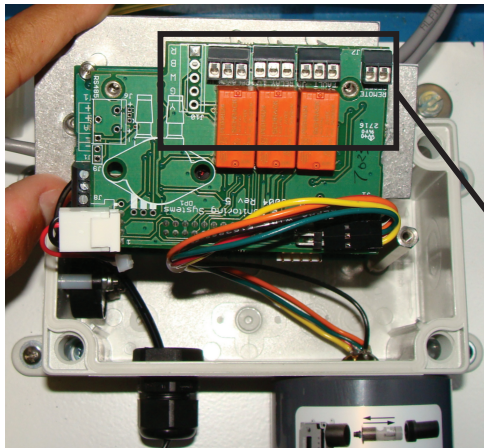

Jumper

If your system has not been pre-wired by CONCOA, after connecting wires as described above:

- from the detector front panel, set the fault alarm to "INVERT" (fail-safe);
- the yellow "FAULT" LED will now be illuminated to indicate normal condition (no fault present);
- when a fault is present, the yellow "FAULT" LED will go out.

Minimum Wiring

Connect to "CONTACT" terminal of appropriate input on 585 1008. Refer to CONCOA ADI # 99065850.

Connect to "+12 VDC" terminal of appropriate input on 585 1008. Refer to CONCOA ADI # 99065850.

