



5600 Series Single Stage Regulator

Single
Stage

Medium Duty Rugged Welding, Heating and Cutting

Features


- Heavy Forged Brass Bonnet
 - *High Durability*
- Medium Seat Displacement
 - *Good flow capacity*
- Capsule® Seat Assembly
 - *High cycle life*

Material

- Forged Brass Body
- PTFE Seat
- 25 Micron Bronze Capsule® Filter

Specification

- 3000 psi Max Inlet
- Temperature Range -40° to 140°F (-40° to 60°C)

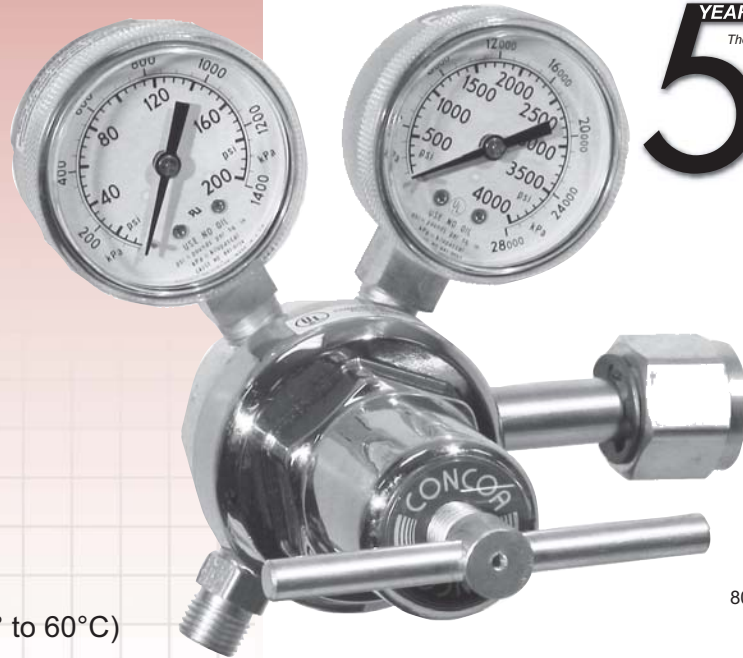

5 YEAR WARRANTY

5

The CONCOA Capsule® is warranted for five years to be free of defects in materials and workmanship.



806-5606 Shown

Gas Service	Stock Number	Inlet CGA	Delivery Range PSIG	Outlet Fittings	Pressure Gauges
Oxygen	806-5606	540	0-125 PSIG	9/16"-18"B" RH Ext.	200 & 4000 PSIG
	806-5616	540	0-250 PSIG	1/4" NPT (M)	400 & 4000 PSIG
Acetylene	806-5602	300	0-15** PSIG	9/16"-18"B" RH Ext.	30 & 400 PSIG
Acetylene, MAPP, Propylene and Propane (Fuel Gas)	806-5609	510	0-15** PSIG	9/16"-18"B" LH Ext.	30 & 400 PSIG
Propylene, MAPP, Propane (Fuel Gas)	806-5632 (not for Acetylene)	510	0-40** PSIG	9/16"-18"B" RH Ext.	60 & 400 PSIG
Argon, Nitrogen, Helium (Inert Gas)	806-5601	580	0-120 PSIG	5/8"-18"B" RH Int.	200 & 4000 PSIG
	806-5611	580	0-250 PSIG	1/4" NPT (M)	400 & 4000 PSIG
Hydrogen Methane	806-5681	350	0-40 PSIG	9/16"-18"B" LH Ext.	60 & 4000 PSIG
Industrial Air	806-5603	590	0-125 PSIG	1/4" NPT (M)	200 & 4000 PSIG
	806-5613	590	0-250 PSIG	1/4" NPT (M)	400 & 4000 PSIG
Breathing Air	806-5608	346	0-125 PSIG	1/4" NPT (M)	200 & 4000 PSIG
	806-5618	346	0-250 PSIG	1/4" NPT (M)	400 & 4000 PSIG

** Acetylene should not be used over 15 PSIG.