

492 SERIES REGULATORS



The 492 Series cylinder regulators are intended for primary pressure control of non-corrosive gases at a maximum inlet pressure of 6000 PSIG (415 BAR). Rather than a diaphragm, the 492 Series regulator uses a robust piston assembly to ensure safe pressure control at high inlet pressures. The CONCOA 492 Series regulator is available with a variety of options installed at the factory. The regulator may be configured as a single station manifold with or without purge, low-pressure alarm, or multiple inlets.

Typical Applications

- Airplane Strut Charging
- Research and Development Laboratories
- Chemical Manufacturing
- Aerospace Hydraulic Systems
- Pharmaceutical Manufacturing
- Gauge Calibration



492 3921-01-350 shown

Features

CAPSULE® Seat increases serviceability and life

Large Piston Sensor controls pressure to 6000 PSIG (415 BAR)

Low Wetted Surface Area minimizes purge requirements

Field-Adjustable Pressure Limit safeguards downstream equipment

Front and Rear Panel-Mountable allows easy installation

Six Port Design offers installation alternatives

Pressure Ranges 0-750 to 0-6000 PSIG (0-50 to 0-415 BAR) facilitates a broad range of applications

Materials and Specifications

Maximum Inlet Pressure (bare body): 3000 PSIG (210 BAR); 5500 PSIG (380 BAR); or 6000 PSIG (415 BAR)

Body: Chrome-plated brass barstock

Bonnet: Chrome-plated brass barstock

Gauges: 2 1/2 in (63 mm) diameter stainless steel

Seats: PCTFE 3000 PSIG (210 BAR) and 4500 PSIG (310 BAR) inlet; or PEEK 6000 PSIG (415 BAR) inlet option

Filter: 10-micron sintered bronze

Temperature Range: -40°F to 140°F (-40°C to 60°C)

Piston: Brass barstock

Cv: 0.1 See *flow curves attached*

Helium Leak Integrity: 1×10^{-8} scc/sec

Internal Seals: FKM (encapsulated)


Ports (bare body): 1/4 in FNPT

Conformances: Cleanliness meets or exceeds CGA G-4.1; PED 2014/68/EU; ANSI/ASME B40.1; CRN OH5216

492 SERIES REGULATORS



Installation Dimensions

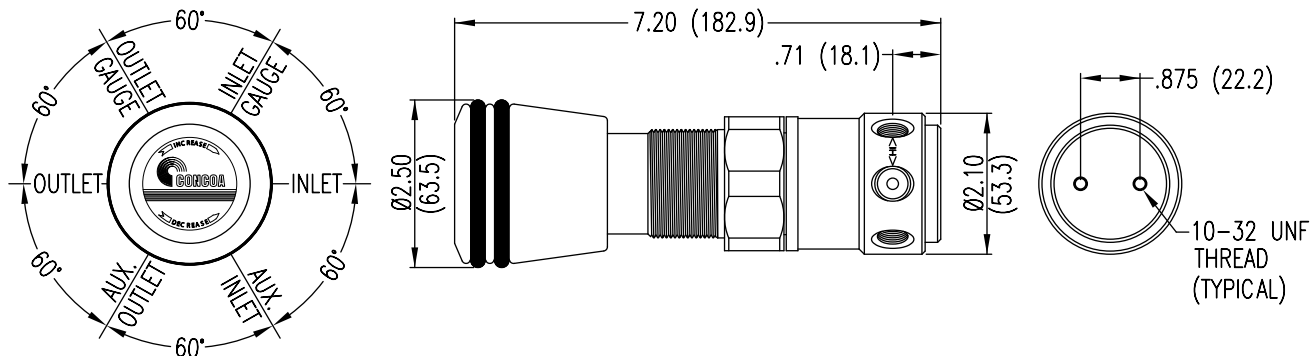

Ordering Information

492	A	B	C	D	-CON	Options		
Series 492	Outlet Pressure	Outlet Gauge	Inlet Maximum	Inlet Gauge	Outlet Assemblies	Assembly Gauges	Inlet Connections	Installed Options
	1: 0-750 PSIG (50 BAR)	0-1000 PSIG/ 0-70 BAR	0: 6000 PSIG (415 BAR)*	None	0: 1/4" FNPT	0: Bare body [†]	<i>CGA DIN 477 BS 341 and others available.</i>	B: Protocol alarm station with pressure switch gauges C: Protocol switchover station
	2: 0-1500 PSIG (0-100 BAR)	0-4000 PSIG/ 0-275 BAR	3: 3000 PSIG (210 BAR)	0-4000 PSIG/ 0-275 BAR	1: 1/4" MNPT	1: Standard assembly (PSIG/kPa gauges)		E: Protocol alarm station with intrinsically safe transducer for hazardous environments
	3: 0-2500 PSIG (0-170 BAR)	0-4000 PSIG/ 0-275 BAR	8: 5500 PSIG (380 BAR)	0-6000 PSIG/ 0-415 BAR	2: 1/4" tube fitting	2: Standard assembly (BAR/PSIG gauges)		H: Protocol switchover alarm station with pressure switch gauges
	4: 0-4500 PSIG (0-310 BAR)*	0-6000 PSIG/ 0-415 BAR	9: 6000 PSIG (415 BAR)	0-10,000 PSIG/ 0-700 BAR	5: Needle valve 1/4" MNPT	6: Mirror image (PSIG/kPa gauges)		J: Protocol alarm station with standard transducer for non-hazardous environments
	5: 0-6000 PSIG (0-415 BAR) [†]	0-10,000 PSIG/ 0-700 BAR	<i>*Only valid if D = 1 or 2 (outlet gauge specified).</i>		6: 1/8" tube fitting	7: Mirror image (BAR/PSIG gauges)		K: Protocol switchover alarm station with standard transducer for non-hazardous environments
	6: 0-3500 PSIG (0-240 BAR)*	0-6000 PSIG/ 0-415 BAR			7: 3/8" tube fitting	<i>[†]B must be 3, 8 or 9 (maximum pressure specified).</i>		M: Protocol station Q: Protocol purge station*
	<i>*Not available with 3000 PSIG (210 BAR) maximum inlet pressure.</i>				F: Needle valve 1/4" tube fitting			X: Protocol switchover alarm station with intrinsically safe transducer for hazardous environments
	<i>[†]Only available with 6000 PSIG (415 BAR) maximum inlet pressure.</i>				M: 6mm tube fitting			<i>*3000 PSIG (210 BAR) maximum inlet only valid if B=3.</i>
					<i>Note: Outlet fittings and outlet valves are 316 stainless steel.</i>			

Related Options

Part No.	Description
830 6483	Panel Mount Kit for 492/493/1400 Series Regulators

492 SERIES REGULATORS



Flow Curves for 492 Series

