





532 SERIES

Flashback Arrestors

CONCOA's 532 Series of stainless steel and brass flashback arrestors prevent the transmission of flame in the supply line and equipment of high purity gas systems. An automatic valve in the 532 Series flashback arrestor cuts off gas supply in the event of flame stabilization inside the body of the arrestor.

The arrestors incorporate a non-return valve to prevent reverse flow of gases. With the brass arrestors, a positive shut off of reverse flow permits resetting and reuse after flashback has occurred.

532 Series Flashback Arrestors meet the safety requirements of BS6158, EN 730 (BAM/DIN), ISO 5175, and AS 4603.

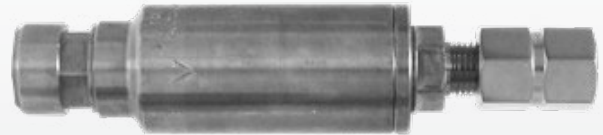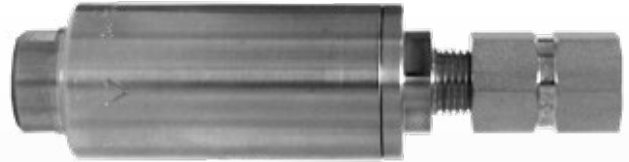

Stainless Steel Model Materials and Specifications

Body and Internals	316L stainless steel
Elastomers	Viton®
Temperature Sensor	Polyethylene
Valve Spring	316 stainless steel
Weight	1.4 lbs. (0.64 kg)
Connections	1/4" FPT



Brass Model Materials and Specifications

Body and Internals	Brass with brass internals
Elastomers	Neoprene
Temperature Sensor	Polyethylene
Valve Spring	316 stainless steel
Weight	1.5 lbs. (0.68 kg)
Connections	1/4" FPT

Ordering Information

Order No.	Body	Description	Size/Dimensions
532 7000	316L stainless steel	Fuel gas flash arrestor (with check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7001	316L stainless steel	Oxygen flash arrestor (with check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7002	316L stainless steel	Hydrogen flash arrestor (with high flow check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7003	Brass	Fuel gas flash arrestor (with check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7004	Brass	Oxygen flash arrestor (with check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7005	Brass	Fuel gas flash arrestor (with high flow check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7006	Brass	Oxygen flash arrestor (with high flow check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)
532 7007	Brass	Hydrogen flash arrestor (with high flow check valve)	1 1/4" x 4 3/4" (0.57mm x 2.15mm)